
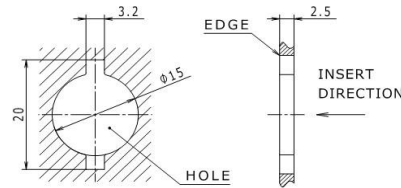


2B6U Gear Damper

SOC Free
Made in China

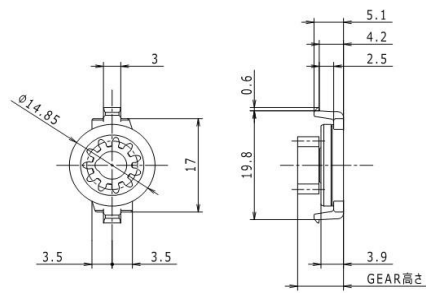

FITTING HOLE SHAPE (REFERENCE)

◆特征

- ✓ 扭矩类型8种
- ✓ 齿轮种类4种

◆构成部件

名称	材料
HOUSING	PC
ROTOR	POM
CAP	PC
GEAR	附记
O-RING	EPDM
OIL	SILICONE

● GEAR式样

类型	11	11H	13	16
齿数	11	11	13	16
齿宽	3.6	5.6	3.6	4.4
GEAR高度	7.95	10	8	8.5
模数	0.8	0.8	0.8	0.8
节圆直径	φ8.8	φ8.8	φ10.4	φ12.8
压力角	20°	20°	14.5°	20°
材料	POM	POM	PA66	PA66

渐开线标准齿

◇ 零件编号·式样

零件编号	额定扭矩 [mN·m]	0	2	4	6	8	10	12	14	16	18	20	22	24	26
2B6U - 02	2.0 ± 0.8		■												
2B6U - 03	2.5 ± 0.8		■	■											
2B6U - 04	4.0 ± 1.2			■	■										
2B6U - 07	7.0 ± 1.4				■	■									
2B6U - 09	9.0 ± 1.6					■	■								
2B6U - 13	13.5 ± 1.8						■	■							
2B6U - 15	15.0 ± 2.0							■	■						
2B6U - 21	21.0 ± 2.5									■	■				


旋转速度 20r/min

● 耐久式样


条件	1 循环：正转1.5转/1秒→暂停/1秒→反转1.5转/1秒→暂停/1秒
次数	50,000循环 常温 (23℃)

◇ 阻尼器特性

● 回转力追从特性 (23℃)

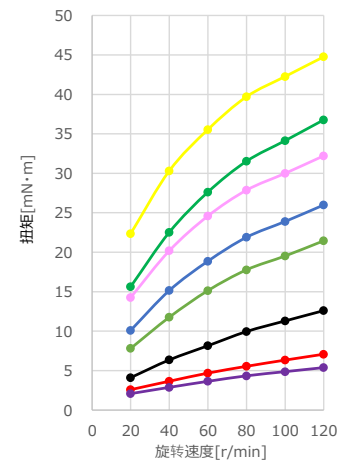

● 温度特性 (20r/min)

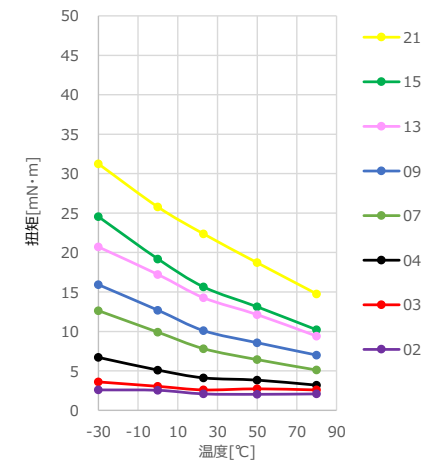

※ 规格如有变更，恕不另行通知。