

### ◆ 特征

- ✓ 有贯通孔最小尺寸
- ✓ 扭矩类型2种

### ◆ 構成部品

| 名称        | 材料       |
|-----------|----------|
| HOUSING   | POM      |
| ROTOR     | PC       |
| O-RING(A) | VMQ      |
| O-RING(B) | VMQ      |
| OIL       | SILICONE |

### ◇ 零件编号・式样

| 零件编号      | 额定扭矩 [mN·r | 0 | 5 | 10 | 15 | 20 | 50 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 |
|-----------|------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 19JT - 09 | 8.5 ± 2.5  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 19JT - 16 | 15.5 ± 4.5 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |


旋转速度 20r/min

### ● 耐久仕様


- 条件** 1 循环：正转0.5转/1秒→暂停/2秒→反转0.5转/1秒→暂停/2秒
- 回数** 10,000循环 常温 (23℃)

### ◇ 阻尼器特性

#### ● 回转追従特性 (23℃)

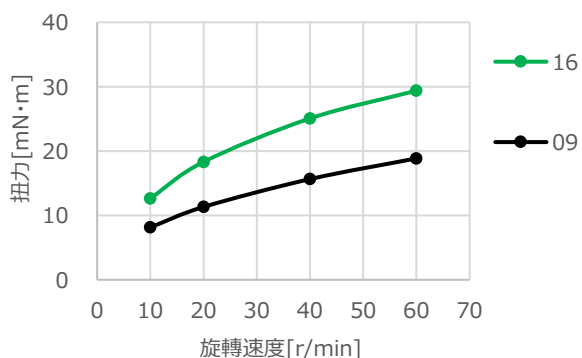

#### ● 温度特性 (20r/min)

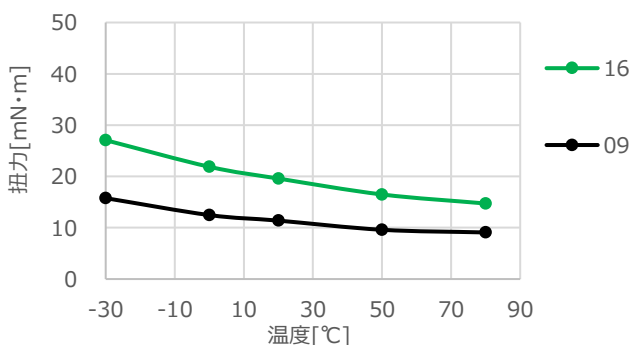

※ 规格如有变更，恕不另行通知